




Electrofusion 45° elbow

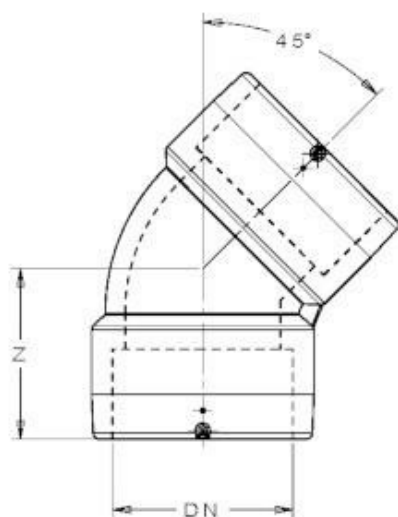

Description

Electrofusion 45° elbow for applications under pressure, manufactured by injection moulding of high-density polyethylene in accordance with standards EN12201-3 and EN1555-3.

The fitting is supplied by a company operating under a quality system according to UNI EN ISO 9001:2015, certified and validated by an accredited third party.

Dimensions

DN/OD	Z	SDR
20	52	11
25	53	11
32	49	11
40	52	11
40	54	11
50	57	11
50	63	11
63	65	11
75	71	11
75	81	11
90	82	11
110	115	11
125	120	11
140	127	11
160	137	11
180	160	11
200	182	11
225	203	11
250	237	11
315	275	11

The Company reserves the right to change the dimensional characteristics listed in the table without prior notice while maintaining the performance indicated.

Correspondence SDR - PN - Series

SDR	PN (PE100)	S (EN 1555)
26	6	-
17	10	8
11	16	5
7,4	25	-

