



Electrofusion coupler



Description


Electrofusion coupler for applications under pressure, manufactured by injection moulding of high-density polyethylene in accordance with standards EN12201-3 and EN1555-3.

The fitting is supplied by a company operating under a quality system according to UNI EN ISO 9001:2015, certified and validated by an accredited third party.

SDR26

Dimensions

DN/OD	DE	Z
110	129	150
125	155	160
140	173	172
160	185	184
180	220	190
200	229	209
225	258	226
250	288	246
280	323	231
315	360	251
355	406	289
400	462	304
450	513	387
500	570	385
560	635	455
630	690	439
710	776	450
800	872	455
900	982	500
1000	1096	500
1200	1335	465

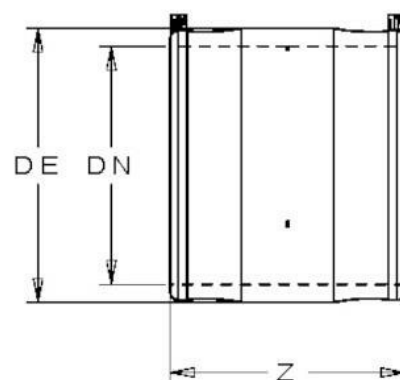

The Company reserves the right to change the dimensional characteristics listed in the table without prior notice while maintaining the performance indicated.

Correspondence SDR - PN - Series

SDR	PN (PE100)	S (EN 1555)
26	6	-
17	10	8
11	16	5
7,4	25	-





SYSTEM GROUP

SCHEDA TECNICA


Codice articolo 209x20E

Electrofusion coupler

SDR17

Dimensions

DN/OD	DE	Z
90	106	130
110	129	150
125	155	156
140	173	172
160	185	184
180	220	190
200	229	209
225	259	226
250	288	246
280	323	231
315	360	251
355	406	289
400	462	304
450	508	382
500	570	386
560	642	455
630	718	502
710	814	500
800	916	500
900	1030	520
1000	1144	536
1100	1240	540
1200	1365	600





SYSTEM GROUP

SCHEDA TECNICA


Codice articolo 209x20E

Electrofusion coupler

SDR11

Dimensions

DN/OD	DE	Z
20	29	70
25	34	74
32	44	85
40	54	92
50	66	97
63	78	113
75	95	120
90	112	129
110	136	150
125	155	160
140	173	170
160	197	185
180	220	190
200	246	210
225	277	226
250	310	245
280	345	250
315	390	265
355	438	302
400	495	355
450	554	425
500	610	460
560	696	500
630	780	505
710	868	530
800	975	520
900	1120	552





SYSTEM GROUP

SCHEDA TECNICA

Codice articolo 209x20E

Electrofusion coupler

SDR7.4

Dimensions

DN/OD	DE	Z
32	44	85
40	54	94
50	68	99
63	88	115
75	106	120
90	125	132
110	145	150
125	174	166
140	193	170
160	220	202
180	244	200
200	276	232
225	305	252
250	341	266
280	388	272
315	435	302
355	495	358
400	574	385
450	635	455
500	678	450

