




Electrofusion reduction

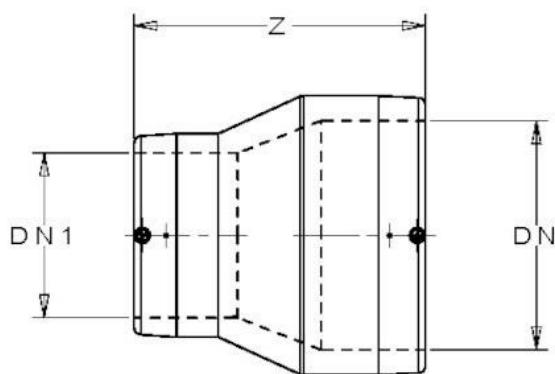

The Company reserves the right to change the dimensional characteristics listed in the table without prior notice while maintaining the performance indicated.

Correspondence SDR - PN - Series

SDR	PN (PE100)	S (EN 1555)
26	6	-
17	10	8
11	16	5
7,4	25	-

Description

Electrofusion reduction for applications under pressure, manufactured by injection moulding of high-density polyethylene in accordance with standards EN12201-3 and EN1555-3.

The fitting is supplied by a company operating under a quality system according to UNI EN ISO 9001:2015, certified and validated by an accredited third party.


Dimensions

DN/OD	DN1	Z	SDR
25	20	77	11
25	20	85	11
32	20	85	11
32	25	77	11
32	20	77	11
32	25	85	11
40	32	95	11
40	25	109	11
40	20	120	11
40	32	109	11
40	32	92	11
50	32	100	11
50	25	120	11
50	40	103	11
50	32	120	11
50	40	92	11
50	32	91	11
63	40	118	11
63	25	145	11
63	40	144	11
63	50	118	11
63	50	102	11
63	32	118	11
75	50	142	11
75	63	143	11
90	63	162	11
90	75	148	11





Electrofusion reduction

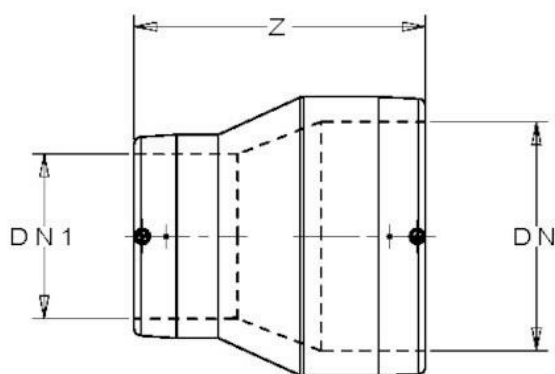

DN/OD	DN1	Z	SDR
90	50	179	11
110	63	210	11
110	75	186	11
110	90	178	11
125	90	194	11
125	63	226	11
125	110	179	11
140	90	212	11
160	110	243	11
160	90	251	11
160	125	244	11
180	160	230	11
180	125	244	11
180	140	246	11
180	90	289	11
200	180	246	11
200	160	275	11
225	160	314	11
250	180	318	11
315	200	414	11
315	250	382	11

