




Electrofusion straight saddle for high volume

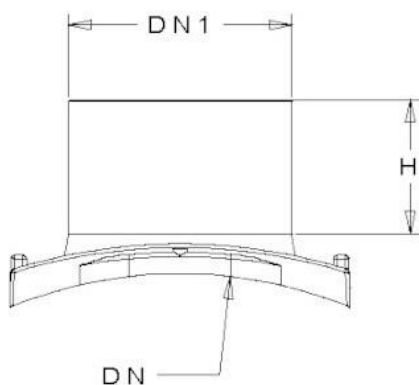

Description

Electrofusion straight saddle for applications under pressure, manufactured by injection moulding of high-density polyethylene in accordance with standards EN12201-3 and EN1555-3.

The fitting is supplied by a company operating under a quality system according to UNI EN ISO 9001:2015, certified and validated by an accredited third party.

Dimensions

DN/OD	DN1	H	SDR
125	110	90	11
160	110	90	11
160	110	110	11
160	125	110	11
180	110	110	11
180	110	110	11
180	125	98	11
200/225	110	110	11
200/225	125	110	11
250/280	110	110	11
250/280	125	110	11
315/400	110	110	11
315/400	125	110	11
315/400	160	110	11
315	200	150	11
315	225	150	11
355	200	150	11
355	225	150	11
400	200	150	11
400	225	150	11
450/500	110	110	11
450/500	160	110	11
450/500	125	110	11
450	250	150	11
450	200	150	11
450	225	150	11
500	250	150	11
500	200	150	11
500	225	150	11
560/630	160	110	11
560	250	150	11

The Company reserves the right to change the dimensional characteristics listed in the table without prior notice while maintaining the performance indicated.


Correspondence SDR - PN - Series

SDR	PN (PE100)	S (EN 1555)
26	6	-
17	10	8
11	16	5
7,4	25	-





Electrofusion straight saddle for high volume

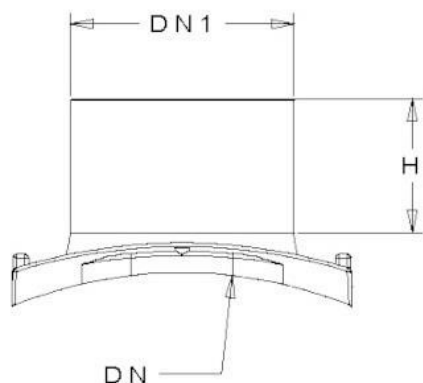

DN/OD	DN1	H	SDR
560/630	110	110	11
560/630	125	110	11
560	200	150	11
560	315	200	11
560	225	160	11
630	200	150	11
630	315	200	11
630	250	150	11
630	225	150	11
710/800	160	110	11
710	200	150	11
710	250	150	11
710/800	110	110	11
710	315	200	11
710/800	125	110	11
710	225	150	11
800	315	200	11
800	250	150	11
800	200	150	11
800	225	150	11
900/1000	160	110	11
900/1000	110	110	11
900	315	200	11
900/1000	125	110	11
900	250	150	11
900	225	150	11
900	200	150	11
1000	250	150	11
1000	315	200	11
1000	225	150	11
1000	200	150	11
1200	315	200	11
1200	200	150	11
1200	250	150	11
1200	225	150	11

