




Electrofusion straight saddle

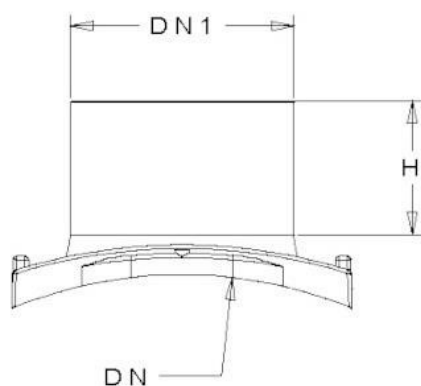

Description

Electrofusion straight saddle for applications under pressure, manufactured by injection moulding of high-density polyethylene in accordance with standards EN12201-3 and EN1555-3.

The fitting is supplied by a company operating under a quality system according to UNI EN ISO 9001:2015, certified and validated by an accredited third party.

Dimensions

DN/OD	DN1	H	SDR
40	20	60	11
40	25	60	11
40	32	60	11
50	20	60	11
50	25	60	11
50	32	60	11
50	40	60	11
63	20	60	11
63	25	60	11
63	32	60	11
63	40	60	11
63	63	75	11
63	50	75	11
75	20	60	11
75	25	60	11
75	32	60	11
75	40	60	11
75	50	75	11
75	50	65	11
75	63	65	11
90	63	75	11
90	20	60	11
90	25	60	11
90	32	60	11
90	40	60	11
90	50	65	11
90	90	100	11
110	75	90	11
110	20	60	11
110	25	60	11
110	32	60	11

The Company reserves the right to change the dimensional characteristics listed in the table without prior notice while maintaining the performance indicated.


Correspondence SDR - PN - Series

SDR	PN (PE100)	S (EN 1555)
26	6	-
17	10	8
11	16	5
7,4	25	-





Electrofusion straight saddle

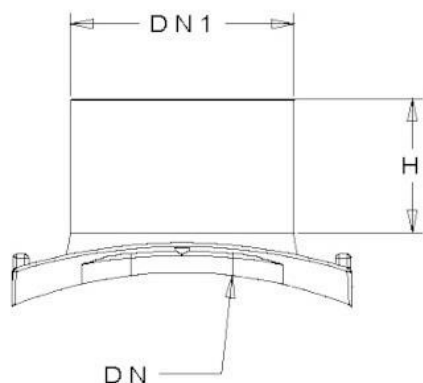


DN/OD	DN1	H	SDR
110	40	60	11
110	63	90	11
110	90	90	11
110	50	65	11
125	20	60	11
125	25	60	11
125	32	60	11
125	40	60	11
125	90	90	11
125	63	90	11
125	75	90	11
125	50	65	11
140	20	60	11
140	25	60	11
140	32	60	11
140	40	60	11
140	20	140	11
140	32	65	11
140	25	65	11
140	75	90	11
140	50	65	11
140	40	65	11
140	90	90	11
160	20	60	11
160	90	90	11
160	25	60	11
160	32	60	11
160	40	65	11
160	63	65	11
160	63	90	11
160	20	65	11
160	75	90	11
160	50	65	11
180/200	63	90	11
180	75	90	11
180	90	90	11
180	20	60	11
180	25	60	11
180	32	60	11
180	40	65	11





Electrofusion straight saddle

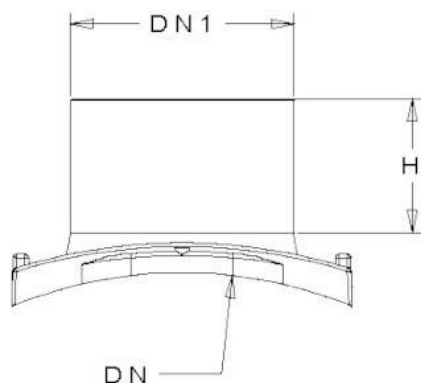

DN/OD	DN1	H	SDR
180	40	90	11
180	63	90	11
180/200	90	90	11
180	20	65	11
180	25	65	11
180	50	65	11
200	40	65	11
200	32	60	11
200	20	60	11
200	75	90	11
200	25	60	11
200	50	65	11
225/280	63	90	11
225/280	75	90	11
225/280	90	90	11
225	32	65	11
225	20	65	11
225	25	65	11
225	40	65	11
225	32	60	11
225	25	60	11
250	25	65	11
250	20	65	11
250	40	65	11
250	32	65	11
250	50	65	11
280	40	65	11
280	50	65	11
280	20	65	11
280	25	65	11
280	32	65	11
315/450	90	90	11
315/450	63	90	11
315/450	75	90	11
315	32	65	11
315	20	65	11
315	50	65	11
315	40	65	11
315	25	65	11
500/900	63	90	11
500/900	90	90	11
500/900	75	90	11

