




Electrofusion tapping tee

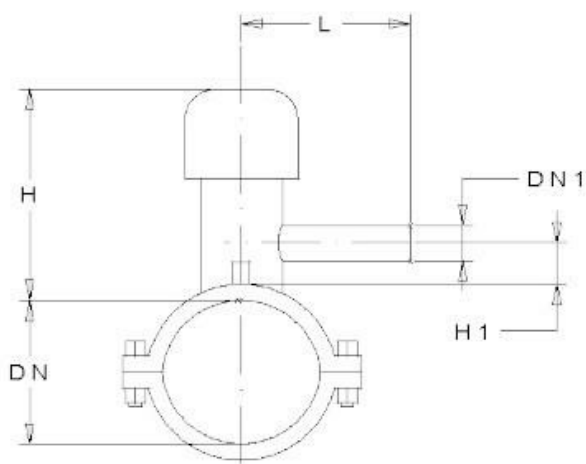

The Company reserves the right to change the dimensional characteristics listed in the table without prior notice while maintaining the performance indicated.

Correspondence SDR - PN - Series

SDR	PN (PE100)	S (EN 1555)
26	6	-
17	10	8
11	16	5
7,4	25	-

Description

Electrofusion tapping tee for applications under pressure, manufactured by injection moulding of high-density polyethylene in accordance with standards EN12201-3 and EN1555-3.

The fitting is supplied by a company operating under a quality system according to UNI EN ISO 9001:2015, certified and validated by an accredited third party.


Dimensions

DN/OD	DN1	H	H1	L	SDR
40	20	91	24	95	11
40	25	91	24	95	11
40	32	91	24	95	11
50	32	91	24	95	11
50	20	91	24	95	11
50	25	91	24	95	11
63	25	91	24	95	11
63	32	91	24	95	11
63	50	145	32	100	11
63	20	91	24	95	11
63	63	155	60	165	11
63	40	128	32	100	11
63	40	155	60	165	11
63	50	155	60	165	11
63	63	145	30	100	11
75	32	94	24	98	11
75	20	94	24	98	11
75	25	94	24	98	11
75	40	152	57	165	11
75	50	152	57	165	11
75	63	152	57	165	11
75	40	125	30	105	11
75	50	210	62	136	11
90	32	94	24	98	11
90	20	94	24	98	11
90	25	94	24	98	11
90	63	152	57	165	11
90	40	152	57	165	11
90	50	152	57	165	11
90	40	125	30	105	11
90	50	210	62	136	11
90	63	210	62	136	11





Electrofusion tapping tee

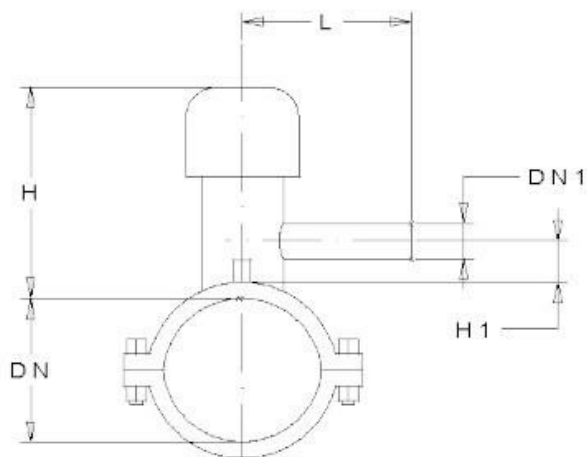


DN/OD	DN1	H	H1	L	SDR
90	63	210	59	134	11
110	32	94	24	98	11
110	20	94	24	98	11
110	25	94	24	98	11
110	50	210	62	136	11
110	63	176	105	165	11
110	40	176	105	165	11
110	50	176	105	165	11
110	63	210	59	125	11
125	20	100	20	100	11
125	32	97	28	103	11
125	25	97	28	103	11
125	63	178	112	165	11
125	40	178	112	165	11
125	40	125	30	105	11
125	50	210	62	136	11
125	63	210	62	134	11
140	50	210	62	136	11
140	63	210	62	134	11
140	20	125	30	105	11
140	40	125	30	105	11
140	32	125	30	105	11
140	25	125	30	105	11
160	20	97	25	108	11
160	25	97	25	108	11
160	32	97	25	108	11
160	63	182	137	165	11
160	50	182	137	165	11
160	40	182	137	165	11
160	40	96	30	105	11
160	63	210	62	134	11
160	50	210	62	136	11
180	25	97	25	108	11
180	32	97	25	108	11
180	63	183	147	165	11
180	40	125	30	105	11
180	20	110	23	100	11
180	50	210	62	136	11
180	63	210	62	134	11
200	63	210	62	134	11
200	50	183	157	165	11
200	20	97	25	108	11





Electrofusion tapping tee

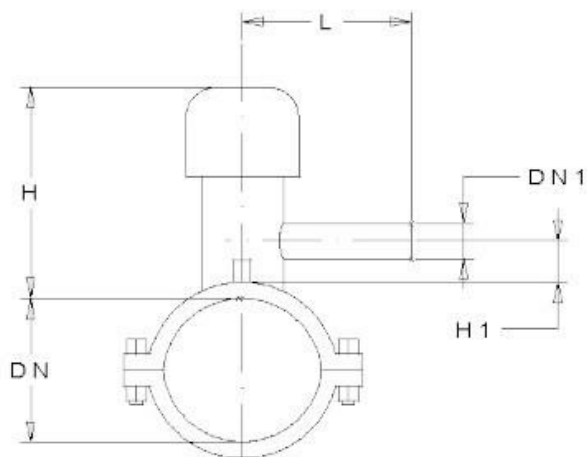

DN/OD	DN1	H	H1	L	SDR
200	25	97	25	108	11
200	32	97	25	108	11
200	63	183	157	165	11
200	50	210	62	136	11
200	40	183	157	165	11
200	40	125	30	105	11
200	20	160	40	105	11
225	20	160	40	105	11
225	50	183	169	165	11
225	32	160	40	105	11
225	63	210	62	134	11
225	63	183	169	165	11
225	40	165	42	105	11
225	25	160	40	105	11
225	50	210	62	136	11
250	25	160	40	105	11
250	20	160	40	105	11
250	40	165	42	105	11
250	50	210	62	136	11
250	63	210	62	134	11
250	32	160	40	105	11
280	63	210	62	134	11
280	50	210	62	136	11
280	32	160	40	105	11
280	25	160	40	105	11
280	40	165	42	105	11
315	50	210	62	136	11
315	20	160	40	105	11
315	25	160	40	105	11
315	32	160	40	105	11
315	63	210	62	134	11
315	40	165	42	105	11

