



Segmented 45° Tee for water under pressure




Description

Segmented 45° Tee for pressurized applications, manufactured by means of butt welding of high-density polyethylene pipes in accordance with standard EN12201-3.

The welding is performed by licensed personnel according to UNI 9737 with procedure according to UNI 10520 - ISO 11414.

The fitting is supplied by a company operating under a quality system according to UNI EN ISO 9001:2015, certified and validated by an accredited third party.

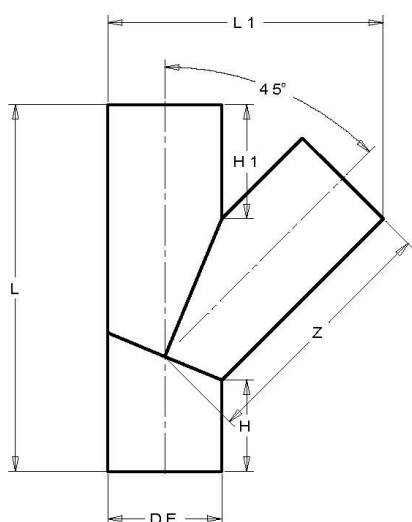

Dimensions

DE	H	H1	Z	L	L1	SDR
90	160	200	310	490	300	26÷11
110	160	200	330	520	330	26÷11
125	160	200	350	540	350	26÷11
140	160	200	370	560	380	26÷11
160	160	200	390	590	410	26÷11
180	200	300	520	755	520	26÷11
200	200	300	540	785	550	26÷11
225	250	300	570	870	600	26÷11
250	250	300	600	905	640	26÷11
280	300	400	740	1100	760	26÷11
315	300	400	780	1150	820	26÷11
355	300	400	830	1205	890	26÷11
400	400	500	980	1470	1030	26÷11
450	400	500	1040	1540	1120	26÷11

Correspondence SDR - PN – SN

SDR	PN (PE100)	SN
33	5	2
26	6	4
21	8	8
17	10	16
13.6	12.5	33
11	16	67
9	20	130
7.4	25	254

