




Segmented 90° Cross for water under pressure

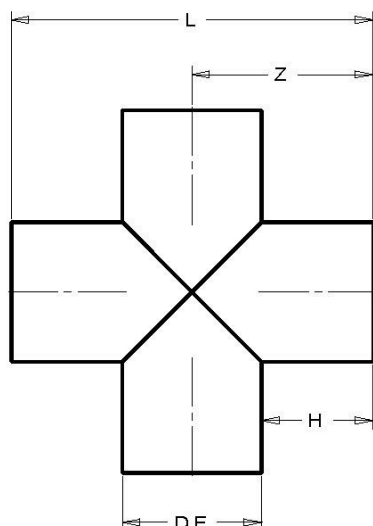

Description

Segmented 90° cross for pressurized applications, manufactured by means of butt welding of high-density polyethylene pipes in accordance with standard EN12201-3.

The welding is performed by licensed personnel according to UNI 9737 with procedure according to UNI 10520 - ISO 11414.

The fitting is supplied by a company operating under a quality system according to UNI EN ISO 9001:2015, certified and validated by an accredited third party.

Dimensions

DE	H	Z	L	SDR
mm	mm	mm	mm	-
110	160	220	440	17÷7,4
125	160	220	440	17÷7,4
140	160	230	460	17÷7,4
160	160	240	480	33÷7,4
180	200	290	580	26÷7,4
200	200	300	600	33÷7,4
225	250	360	720	26÷7,4
250	250	380	760	33÷7,4
280	300	440	880	26÷7,4
315	300	460	920	33÷7,4
355	300	480	960	17÷11
400	400	600	1200	17÷11
450	400	630	1260	17÷11
500	400	650	1300	17÷11
560	500	780	1560	17÷11
630	500	820	1640	17÷11

Correspondence SDR - PN - SN

SDR	PN (PE100)	SN
33	5	2
26	6	4
21	8	8
17	10	16
13.6	12.5	33
11	16	67
9	20	130
7.4	25	254

