




Segmented 90° Tee for water under pressure

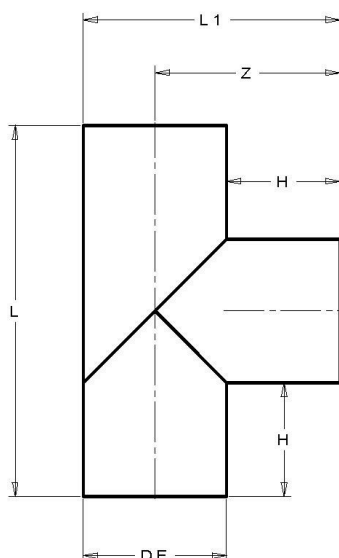

Description

Segmented 90° Tee for pressurized applications, manufactured by means of butt welding of high-density polyethylene pipes in accordance with standard EN12201-3.

The welding is performed by licensed personnel according to UNI 9737 with procedure according to UNI 10520 - ISO 11414.

The fitting is supplied by a company operating under a quality system according to UNI EN ISO 9001:2015, certified and validated by an accredited third party.

Dimensions

DE	H	Z	L	L1	SDR
90	150	200	390	240	17÷7,4
110	160	220	430	270	17÷7,4
125	160	220	450	290	17÷7,4
140	160	230	460	300	17÷7,4
160	160	240	480	320	33÷7,4
180	200	290	580	380	26÷7,4
200	200	300	600	400	33÷7,4
225	250	360	730	480	26÷7,4
250	250	380	750	500	33÷7,4
280	300	440	880	580	26÷7,4
315	300	460	920	620	33÷7,4
355	300	480	960	660	33÷7,4
400	400	600	1200	800	33÷7,4
450	400	630	1250	850	33÷7,4
500	400	650	1300	900	33÷11
560	500	780	1560	1060	26÷11
630	500	820	1630	1130	33÷11
710	600	960	1910	1310	26÷17
800	600	1000	2000	1400	33÷17
900	600	1050	2100	1500	26÷17
1000	600	1100	2200	1600	33÷17

Correspondence SDR - PN – SN

SDR	PN (PE100)	SN
33	5	2
26	6	4
21	8	8
17	10	16
13.6	12.5	33
11	16	67
9	20	130
7.4	25	254

