




Segmented 90° bend for water under pressure

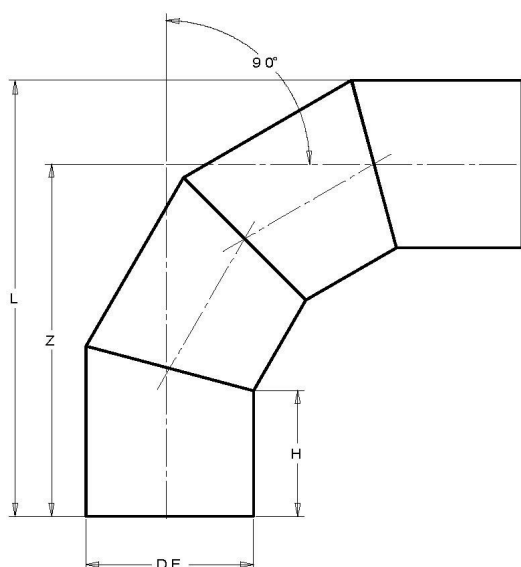

Description

Segmented 90° elbow for pressurized applications, manufactured by means of butt welding of high-density polyethylene pipes in accordance with standard EN12201-3. The welding is performed by licensed personnel according to UNI 9737 with procedure according to UNI 10520 - ISO 11414. The fitting is supplied by a company operating under a quality system according to UNI EN ISO 9001:2015, certified and validated by an accredited third party.

Dimensions

DE	H	Z	L	SDR
mm	mm	mm	mm	-
50	100	220	250	17÷11
63	100	230	260	17÷11
75	100	230	270	17÷11
90	100	240	290	17÷7,4
110	150	340	400	17÷7,4
125	150	350	410	17÷7,4
140	150	400	470	17÷7,4
160	150	430	510	33÷7,4
180	150	440	530	26÷7,4
200	200	500	600	33÷7,4
225	250	640	750	26÷7,4
250	250	650	780	33÷7,4
280	250	660	800	26÷7,4
315	300	800	960	33÷7,4
355	300	820	1000	33÷7,4
400	300	910	1110	33÷7,4
450	350	980	1210	33÷7,4
500	350	1080	1330	33÷11
560	400	1160	1440	26÷11
630	450	1240	1560	33÷11
710	600	1640	2000	26÷11
800	600	1680	2080	33÷11
900	600	1730	2180	26÷11
1000	600	1780	2280	33÷11
1200	600	1880	2480	33÷26

Correspondence SDR - PN – SN

SDR	PN (PE100)	SN
33	5	2
26	6	4
21	8	8
17	10	16
13.6	12.5	33
11	16	67
9	20	130
7.4	25	254

