




Segmented reduced 90° Tee for water under pressure



Description

Segmented 90° reduced Tee for pressurized applications, manufactured by means of butt welding of high-density polyethylene pipes in accordance with standard EN12201-3. The welding is performed by licensed personnel according to UNI 9737 with procedure according to UNI 10520 - ISO 11414. The fitting is supplied by a company operating under a quality system according to UNI EN ISO 9001:2015, certified and validated by an accredited third party.

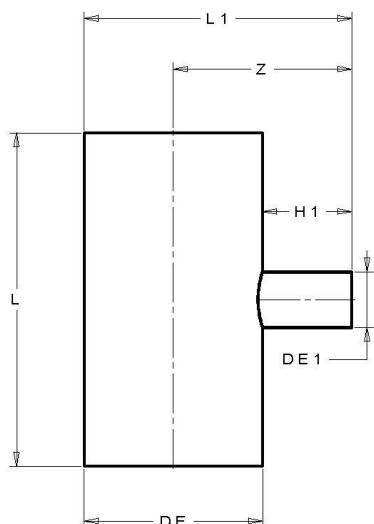

Dimensions

DE	DE1	H1	Z	L	L1	SDR
DE	DE1	H1	Z	L	L1	SDR
160	90	150	230	600	310	26÷11
180	90	150	240	600	330	26÷11
200	90	250	350	600	450	26÷11
225	90-110	250	360	600	480	26÷11
250	90-125	250	380	600	500	26÷11
280	90-140	250	390	600	530	26÷11
315	90-140	250	410	600	570	26÷11
355	90-160	350	530	600	710	26÷11
400	90-200	350	550	1000	750	26÷11
450	160-225	350	580	1000	800	26÷11
500	160-250	350	600	1000	850	26÷11
560	160-280	400	680	1200	960	26÷11
630	160-315	400	720	1200	1030	26÷11
710	160-355	400	760	1500	1110	26÷17
800	160-400	400	800	1500	1200	26÷17
900	160-450	400	850	1500	1300	26÷17
1000	160-500	400	900	1500	1400	26÷17

Correspondence SDR - PN – SN

SDR	PN (PE100)	SN
33	5	2
26	6	4
21	8	8
17	10	16
13.6	12.5	33
11	16	67
9	20	130
7.4	25	254

