



### Coated cast iron flange PN10 for PE stub end




#### Description

Free flange in PN10 coated cast iron, drilled in accordance with the UNI EN 1092-1 standard.

The fitting is supplied by a company operating under a quality system according to UNI EN ISO 9001:2015, certified and validated by an accredited third party.

#### Dimensions

DE	DN	B	K	C	D	L	n° holes	Vite	Coating
200/225	200	238	295	29	346	22	8	M 20	PP
250	250	288	350	31	404	22	12	M 20	PP
280	250	294	350	31	404	22	12	M 20	PP
315	300	337	400	40	456	22	12	M 20	PP
355	350	372.5	460	54.5	521	22	16	M 20	PP
400	400	430.5	515	57	583	26	16	M 24	PP
450	500	515.5	620	55.5	690	26	20	M 24	PP
500	500	530	620	55.5	690	26	20	M 24	PP
560	600	616	725	63.5	804	30	20	M 27	PP
630	600	642	725	63.5	804	30	20	M 27	PP

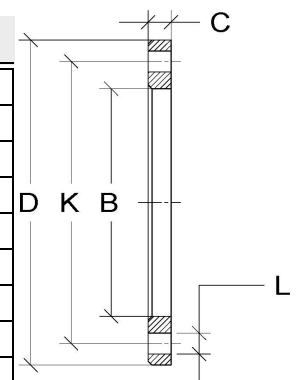

The Company reserves the right to change the dimensional characteristics listed in the table without prior notice while maintaining the performance indicated.

