



Coated cast iron flange PN16 for PE stub end




Description

Free flange in PN16 coated cast iron, drilled in accordance with the UNI EN 1092-1 standard.

The fitting is supplied by a company operating under a quality system according to UNI EN ISO 9001:2015, certified and validated by an accredited third party.

Dimensions

DE	DN	B	K	C	D	L	n° holes	Vite	Coating
32	25	42	85	18	122	14.5	4	M12	PP
40	32	52	100	18	142	18.5	4	M16	PP
50	40	63	110	18.5	155	18	4	M 16	PP
63	50	78	125	18.5	170	18	4	M 16	PP
75	65	92	145	20	191	18	4	M 16	PP
90	80	108	160	21	206	18	8	M 16	PP
110	100	127	180	22	226	18	8	M 16	PP
125	100	134	180	22	226	18	8	M 16	PP
140	125	158	210	22	256	18	8	M 16	PP
160	150	178	240	25	291	22	8	M 20	PP
180	150	186	240	25	291	22	8	M 20	PP
200/225	200	238	295	29	346	22	12	M 20	PP
250	250	288	355	34	412	26	12	M 24	PP
280	250	294	355	34	412	26	12	M 24	PP
315	300	337	410	42	468	26	12	M 24	PP
355	350	372.5	470	54.5	532.5	26	16	M 24	PP
400	400	431.6	525	57	597	30.5	16	M 27	PP

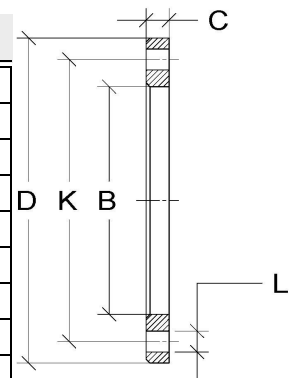

The Company reserves the right to change the dimensional characteristics listed in the table without prior notice while maintaining the performance indicated.

