




### Galvanized steel blind flange PN16




#### Description

Blind flange in galvanized steel PN16, manufactured by drilling in accordance with standard UNI EN 1092-1

The fitting is supplied by a company operating under a quality system according to UNI EN ISO 9001:2015, certified and validated by an accredited third party.

#### Dimensions

| DE   | DN   | K    | C       |         | D    | L  | n° holes | Vite |
|------|------|------|---------|---------|------|----|----------|------|
|      |      |      | Reduced | Nominal |      |    |          |      |
| 20   | 15   | 65   | 10      | 14      | 95   | 14 | 4        | M 12 |
| 25   | 20   | 75   | 10      | 16      | 105  | 14 | 4        | M 12 |
| 32   | 25   | 85   | 10      | 16      | 115  | 14 | 4        | M 12 |
| 40   | 32   | 100  | 12      | 18      | 140  | 18 | 4        | M 16 |
| 50   | 40   | 110  | 12      | 18      | 150  | 18 | 4        | M 16 |
| 63   | 50   | 125  | 12      | 20      | 165  | 18 | 4        | M 16 |
| 75   | 65   | 145  | 12      | 20      | 185  | 18 | 4        | M 16 |
| 90   | 80   | 160  | 13      | 20      | 200  | 18 | 8        | M 16 |
| 110  | 100  | 180  | 13      | 22      | 220  | 18 | 8        | M 16 |
| 125  | 100  | 180  | 13      | 22      | 220  | 18 | 8        | M 16 |
| 140  | 125  | 210  | 14      | 22      | 250  | 18 | 8        | M 16 |
| 160  | 150  | 240  | 14      | 24      | 285  | 22 | 8        | M 20 |
| 180  | 150  | 240  | 14      | 24      | 285  | 22 | 8        | M 20 |
| 200  | 200  | 295  | 16      | 26      | 340  | 22 | 12       | M 20 |
| 225  | 200  | 295  | 16      | 26      | 340  | 22 | 12       | M 20 |
| 250  | 250  | 355  | 18      | 29      | 405  | 26 | 12       | M 24 |
| 280  | 250  | 355  | 18      | 29      | 405  | 26 | 12       | M 24 |
| 315  | 300  | 410  | 20      | 32      | 460  | 26 | 12       | M 24 |
| 355  | 350  | 470  | 20      | 35      | 520  | 26 | 16       | M 24 |
| 400  | 400  | 525  | 22      | 38      | 580  | 30 | 16       | M 27 |
| 450  | 500  | 650  | 22      | 46      | 715  | 33 | 20       | M 30 |
| 500  | 500  | 650  | 22      | 46      | 715  | 33 | 20       | M 30 |
| 560  | 600  | 770  | 25      | 55      | 840  | 36 | 20       | M 33 |
| 630  | 600  | 770  | 25      | 55      | 840  | 36 | 20       | M 33 |
| 710  | 700  | 840  | 25      | 63      | 910  | 36 | 24       | M 33 |
| 800  | 800  | 950  | 28      | 74      | 1025 | 39 | 24       | M 36 |
| 900  | 900  | 1050 | 28      | 82      | 1125 | 39 | 28       | M 36 |
| 1000 | 1000 | 1170 | 30      | 90      | 1255 | 42 | 28       | M 39 |
| 1200 | 1200 | 1390 | 30      | 90      | 1485 | 48 | 32       | M 45 |

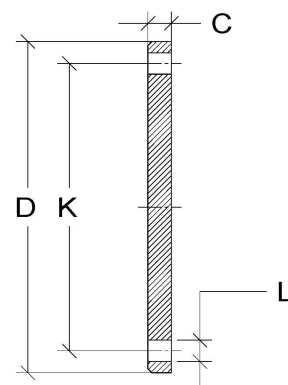

The Company reserves the right to change the dimensional characteristics listed in the table without prior notice while maintaining the performance indicated.

