



Galvanized steel flange PN10 for PE stub end




Description

Flange in galvanized steel PN10, manufactured by drilling in accordance with standard UNI EN 1092-1

The fitting is supplied by a company operating under a quality system according to UNI EN ISO 9001:2015, certified and validated by an accredited third party.

Dimensions

DE	DN	B	K	C		D	L	n° holes	Vite
				Reduced	Nominal				
20	15	28	65	10	14	95	14	4	M 12
25	20	34	75	10	16	105	14	4	M 12
32	25	43	85	10	16	115	14	4	M 12
40	32	50	100	12	18	140	18	4	M 16
50	40	62	110	12	18	150	18	4	M 16
63	50	78	125	12	20	165	18	4	M 16
75	65	95	145	12	20	185	18	4	M 16
90	80	109	160	13	20	200	18	8	M 16
110	100	130	180	13	22	220	18	8	M 16
125	100	135	180	13	22	220	18	8	M 16
140	125	160	210	14	22	250	18	8	M 16
160	150	180	240	14	24	285	22	8	M 20
180	150	190	240	14	24	285	22	8	M 20
200	200	235	295	16	24	340	22	8	M 20
225	200	238	295	16	24	340	22	8	M 20
250	250	288	350	18	26	395	22	12	M 20
280	250	294	350	18	26	395	22	12	M 20
315	300	338	400	20	26	445	22	12	M 20
355	350	376	460	20	30	505	22	16	M 20
400	400	430	515	22	32	565	26	16	M 24
450	500	517	620	22	38	670	26	20	M 24
500	500	533	620	22	38	670	26	20	M 24
560	600	618	725	25	42	780	30	20	M 27
630	600	645	725	25	42	780	30	20	M 27
710	700	740	840	25	50	895	30	24	M 27
800	800	843	950	28	56	1015	33	24	M 30
900	900	947	1050	28	62	1115	33	28	M 30
1000	1000	1050	1160	30	70	1230	36	28	M 33
1200	1200	1248	1380	30	83	1455	39	32	M 36

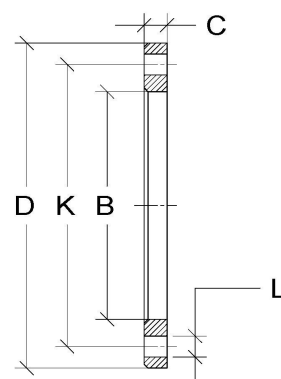

The Company reserves the right to change the dimensional characteristics listed in the table without prior notice while maintaining the performance indicated.

