



Galvanized steel flange PN6 for PE stub end




Description

Flange in galvanized steel PN6, manufactured by drilling in accordance with standard UNI EN 1092-1

The fitting is supplied by a company operating under a quality system according to UNI EN ISO 9001:2015, certified and validated by an accredited third party.

Dimensions

DE	DN	B	K	C		D	L	n° holes	Vite
				Reduced	Nominal				
20	15	28	55	8	12	80	11	4	M 10
25	20	34	65	9	14	90	11	4	M 10
32	25	43	75	9	14	100	11	4	M 10
40	32	50	90	9	16	120	14	4	M 12
50	40	62	100	9	16	130	14	4	M 12
63	50	78	110	9	16	140	14	4	M 12
75	65	95	130	9	16	160	14	4	M 12
90	80	109	150	10	18	190	18	4	M 16
110	100	130	170	10	18	210	18	4	M 16
125	100	135	170	10	18	210	18	4	M 16
140	125	160	200	10	20	240	18	8	M 16
160	150	180	225	10	20	265	18	8	M 16
180	150	190	225	10	20	265	18	8	M 16
200	200	235	280	12	22	320	18	8	M 16
225	200	238	280	12	22	320	18	8	M 16
250	250	288	335	14	24	375	18	12	M 16
280	250	294	335	14	24	375	18	12	M 16
315	300	338	395	14	24	440	22	12	M 20
355	350	376	445	15	26	490	22	12	M 20
400	400	430	495	16	28	540	22	16	M 20
450	500	517	600	17	30	645	22	20	M 20
500	500	533	600	17	30	645	22	20	M 20
560	600	618	705	17	32	755	26	20	M 24
630	600	645	705	17	32	755	26	20	M 24
710	700	740	810	18	40	860	26	24	M 24
800	800	843	920	19	44	975	30	24	M 27
900	900	947	1020	20	48	1075	30	24	M 27
1000	1000	1050	1120	20	52	1175	30	28	M 27
1200	1200	1248	1340	20	60	1405	33	32	M 30

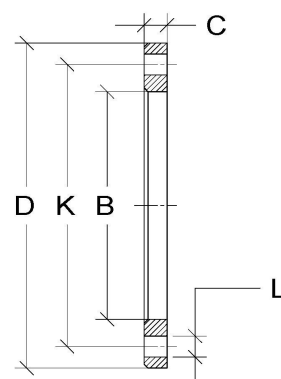

The Company reserves the right to change the dimensional characteristics listed in the table without prior notice while maintaining the performance indicated.

