




Long spigot injection moulded 45° Tee



Description

Long spigot 45° tee for pressurized applications, manufactured by injection moulding of high-density polyethylene in accordance with standards EN12201-3 and EN1555-3.

The fitting is supplied by a company operating under a quality system according to UNI EN ISO 9001:2015, certified and validated by an accredited third party.

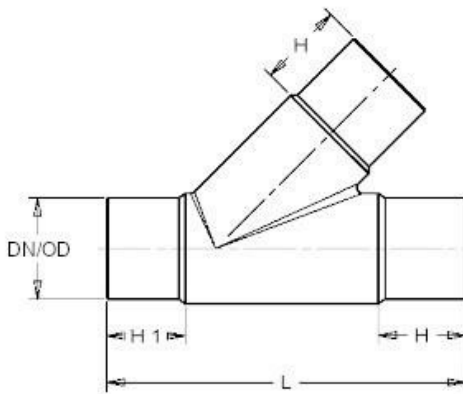

Dimensions

DN/OD	H	H1	Z	SDR
mm	mm	mm	mm	-
63	80	68	284	11
75	90	70	309	11
90	91	82	362	11
110	104	90	398	11
125	121	90	453	11
140	112	102	500	11
160	118	108	525	11

Correspondence SDR - PN – Series

SDR	PN (PE100)	S (EN 1555)
26	6	-
17	10	8
11	16	5
7,4	25	-

The Company reserves the right to change the dimensional characteristics listed in the table without prior notice while maintaining the performance indicated.

