




Long spigot injection moulded 90° Tee

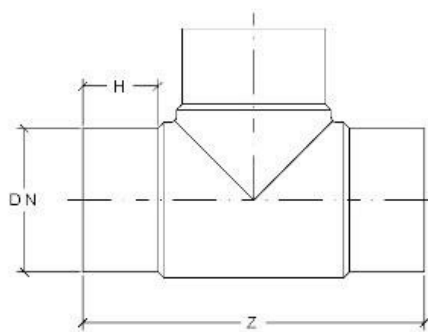

Description

Long spigot 90° tee for pressurized applications, manufactured by injection moulding of high-density polyethylene in accordance with standards EN12201-3 and EN1555-3. The fitting is supplied by a company operating under a quality system according to UNI EN ISO 9001:2015, certified and validated by an accredited third party.

Dimensions

DN/OD	H	Z	SDR
mm	mm	mm	-
20	36	107	11÷7,4
25	46	138	11÷7,4
32	50	147	11÷7,4
40	57	174	11÷7,4
50	57	180	11÷7,4
63	68	229	17÷7,4
75	72	256	17÷7,4
90	81	303	17÷7,4
110	91	336	17÷7,4
125	91	356	17÷7,4
140	96	388	17÷7,4
160	104	423	17÷7,4
180	107	451	17÷7,4
200	117	501	17÷7,4
225	120	538	17÷7,4
250	131	596	17÷7,4
280	142	678	17÷7,4
315	151	702	17÷7,4
355	168	800	17÷7,4
400	180	880	17÷7,4
450	203	985	17÷7,4
500	220	1090	17÷7,4
560	236	1200	17÷7,4
630	255	1310	17÷11

Correspondence SDR - PN - Series

SDR	PN (PE100)	S (EN 1555)
26	6	-
17	10	8
11	16	5
7,4	25	-





SYSTEM GROUP

SCHEDA TECNICA

Codice articolo 202x24N

Long spigot injection moulded 90° Tee

The Company reserves the right to change the dimensional characteristics listed in the table without prior notice while maintaining the performance indicated.

