




Long spigot injection moulded PE100 RC 90° Tee



Description

Long spigot 90° tee for pressurized applications, manufactured by injection moulding of high-density polyethylene PE100 RC in accordance with standards EN12201-3 and EN1555-3.

The fitting is supplied by a company operating under a quality system according to UNI EN ISO 9001:2015, certified and validated by an accredited third party.

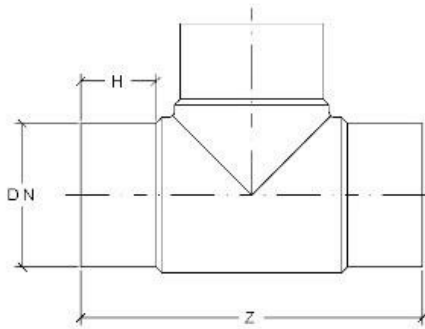

Dimensions

| DN/OD | H | Z | SDR |
|-------|-----|------|--------|
| mm | mm | mm | - |
| 20 | 36 | 107 | 11÷7,4 |
| 25 | 46 | 138 | 11÷7,4 |
| 32 | 50 | 147 | 11÷7,4 |
| 40 | 57 | 174 | 11÷7,4 |
| 50 | 57 | 180 | 11÷7,4 |
| 63 | 68 | 229 | 17÷7,4 |
| 75 | 72 | 256 | 17÷7,4 |
| 90 | 81 | 303 | 17÷7,4 |
| 110 | 91 | 336 | 17÷7,4 |
| 125 | 91 | 356 | 17÷7,4 |
| 140 | 96 | 388 | 17÷7,4 |
| 160 | 104 | 423 | 17÷7,4 |
| 180 | 107 | 451 | 17÷7,4 |
| 200 | 117 | 501 | 17÷7,4 |
| 225 | 120 | 538 | 17÷7,4 |
| 250 | 131 | 596 | 17÷7,4 |
| 280 | 142 | 678 | 17÷7,4 |
| 315 | 151 | 702 | 17÷7,4 |
| 355 | 168 | 800 | 17÷7,4 |
| 400 | 180 | 880 | 17÷7,4 |
| 450 | 203 | 985 | 17÷7,4 |
| 500 | 220 | 1090 | 17÷7,4 |
| 560 | 236 | 1200 | 17÷7,4 |
| 630 | 255 | 1310 | 17÷11 |

Correspondence SDR - PN – Series

| SDR | PN (PE100) | S (EN 1555) |
|-----|------------|-------------|
| 26 | 6 | - |
| 17 | 10 | 8 |
| 11 | 16 | 5 |
| 7,4 | 25 | - |





**SYSTEM
GROUP**

SCHEDA TECNICA

Codice articolo 202x24N_rc

Long spigot injection moulded PE100 RC 90° Tee

The Company reserves the right to change the dimensional characteristics listed in the table without prior notice while maintaining the performance indicated.

