




Short spigot injection moulded end cap

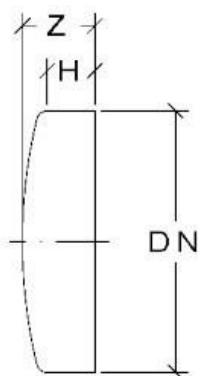

Description

Short spigot end cap for pressurized applications, manufactured by injection moulding of high-density polyethylene in accordance with standards EN12201-3 and EN1555-3. The fitting is supplied by a company operating under a quality system according to UNI EN ISO 9001:2015, certified and validated by an accredited third party.

Dimensions

DN/OD	H	Z	SDR
DE	H	Z	SDR
mm	mm	mm	-
355	95	115	17÷11
400	95	130	17÷11
450	90	120	17÷11
500	90	125	17÷11
560	90	135	17÷11
630	100	155	17÷11

Correspondence SDR - PN - Series

SDR	PN (PE100)	S (EN 1555)
26	6	-
17	10	8
11	16	5
7,4	25	-

The Company reserves the right to change the dimensional characteristics listed in the table without prior notice while maintaining the performance indicated.

